

Our Ref. No.: 15675.p287c
Express Mail No. EL651822585US

UTILITY APPLICATION FOR UNITED STATES PATENT

FOR

DECOY DEVICE AGAINST WAKE-TRACKING TORPEDOES

Inventor(s): Yann Guelou et al.

10020735 424404
T012T 922000T

[illegible]

146 P27
5 decov

~~11/3/82~~ It is conventional in the art of warfare to use
5 decoys to divert or attract enemy weapons fitted with
homing systems.

In particular, at sea, torpedo decoys are already known which are in the form of devices that emit sound signals resembling those from a ship. In this respect
10 reference can advantageously be made to FR-2 660 907 and WO 91/16234.

Also known, in particular from patent application DE 4 322 837, are decoys made of effervescent materials.

15 The invention proposes a decoy device for wake-
following torpedoes, the device comprising a body of
effervescent material that reacts with sea water to
generate a cloud of bubbles simulating a phoney wake, the
device being characterized in that it has a covering of
material that is soluble in sea water which delays the
20 reaction of the effervescent material with sea water.

Advantageously, it also has a covering of material that dissolves in sea water that enables the generation of bubbles to be delayed when the device is immersed in sea water.

25 In particular, the thickness of the covering is
advantageously calibrated so that when said device is
immersed, the effervescent material begins to react with
sea water only after said device has been sinking for a
predetermined length of time. Such a covering makes it
30 possible to improve the effectiveness of the device.

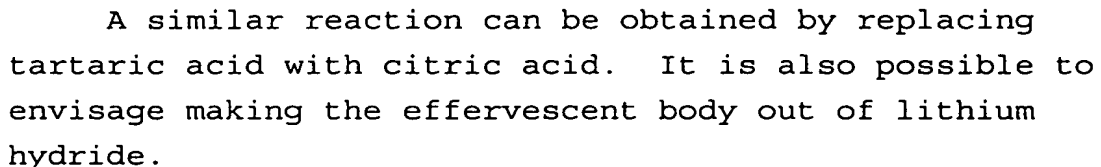
For example, in a preferred embodiment, said thickness is calibrated so that the effervescent material does not begin react with sea water until it is at a depth of about 10 meters.

35 The invention also provides a method of decoying
torpedoes, characterized in that devices of the above-
specified type are dispersed in the sea from the air.

5 ~~116~~ ~~34~~ ~~4~~ · Figure 1 shows a deployment sequence for a device
constituting an embodiment of the invention; and

1825
4825
C3 The effervescent body of a decoy device of the invention is preferably a compact of material that is non-polluting and compressible.

By way of example, the material can be a stoichiometric mixture of tartaric acid (specific gravity 1.7598) and of sodium hydrogen carbonate (specific gravity 2.159).

$$\text{H}_2\text{O}$$


To avoid phenomena of compacts crumbling and to provide a surface that is as regular as possible for covering purposes, the mixtures are compressed with as great a compression ratio as possible, so as to obtain maximum hardness for the compact.

This hardness can be further improved by adding a binder, e.g. of the cellulose type.

Nevertheless, binders tend to inhibit the effervescent action of such compacts, and also tend to
5 cause them to rise to the surface.

It is also possible to add a small quantity (less than 5%) of lubricant to the mixture, e.g. 2% magnesium stearate, so as to prevent seizing while the mixture is being compressed.

10 The bubbles generated by the effervescent compact at a depth of 10 meters, i.e. at a pressure of 2 bars, need to have dimensions lying in the range 30 μm to 50 μm (which corresponds to bubbles at the surface of the water having dimensions lying in the range 38 μm to 63.4 μm).

15 For a given compression ratio of the mixture of the compact, bubble size is mainly a function of the grain size of the raw materials: the finer the raw materials, the smaller the bubbles.

Various grain size ranges can be considered for the
20 particles of the mixture. For example, the diameter of the particles could be less than 100 μm , or could lie in the range 100 μm to 200 μm , or could lie in the range 200 μm to 315 μm .

Nevertheless, it has been observed that grain sizes
25 corresponding to particle diameters of less than 100 μm provide the best compromise in terms of the size of the resulting bubbles (bubble diameter at the surface of the water about 44.7 μm).

The covering which performs the delay function is
30 made of an organic material.

By way of example, it is constituted by a film made by spraying or depositing a polymer solution on the compact. It can also be implemented in the form of capsules in which the effervescent bodies are enclosed.

35 An example of an organic material for the covering of the compact is as follows:

· hydroxypropymethyl cellulose and derivatives thereof (ethyl, butyl, etc.);

· vegetable gums (of the guar, agar, pectin, etc. type);

5 · gums of animal origin (of the xanthane, gelatin, albumin, etc. types);

· polyvinyl alcohol (PVAL);

· poly(N-vinylpyrrolidone) (PVP); or

· poly(ethylene oxide) (PEOX).

10 The shape of the compact is as hemispherical as possible, or else it is cylindrical in shape.

By way of example, the following table gives possible dimensions for various compositions of effervescent compact, and also the sinking speeds which correspond to the various compacts.

15

Nature of compact	Ø in mm	Height in mm	Mass in g	Specific gravity	Sinking rate in m/s
Tartaric A 50% NaHCO ₃ 50%	6	0.53	0.2566	1.71	0.2
Tartaric A 50% NaHCO ₃ 50%	6	0.49	0.2288	1.65	0.21
NaHCO ₃ 50%	12	0.33	0.6731	1.80	0.15
Tartaric A 50%	12	0.33	0.6428	1.72	0.14
Stearate 0.08%					
100 µm - 200 µm	6	0.43	0.1771	1.45	0.2
NaHCO ₃ 50%	6	0.4	0.1565	1.38	--
Tartaric A 50%					
< 100 µm	12	0.17	0.2810	1.46	0.1
Tartaric A 50%	12	0.15	0.2820	1.66	0.1
NaHCO ₃ 50%					
Stearate 0.2%					

4000736 4000736

In addition, the device also advantageously includes ballast-forming means, for the purpose of making it sink faster.

Figures 1 and 2 show how decoying is deployed with devices of the invention as described above.

These devices are thrown to a distance from the aft deck P of a ship, implementing "dagaie" type dispersion in air, using different firing angles depending on the distances between the points where it is desired to distribute said effervescent devices and the ship (stage I in Figure 1).

As shown in Figure 2, the distribution is advantageously on both sides of the axis of the wake S of the ship, possibly together with a certain amount of dispersion so as to provide phoney wakes FS which join the wake S and which can be interpreted by a torpedo as being a change in the direction of the wake.

The devices thrown into the sea sink (stage II in Figure 1), and then after a certain length of time, once the covering has melted, may begin to generate bubbles (stage I/II), rapidly reaching steady bubble generating conditions (stage IV).

By following the phoney wake FS (Figure 2), a torpedo will use up its supply of driving energy before reaching the ship.

Advantageously, this decoying is associated with devices being placed at the intersections between the wake S and the phoney wakes FS, said devices being decharacterization devices and devices for jamming and saturating the acoustic detectors of torpedoes.

10020736 " 44404